




# CM SERIES MODULAR UPS

#### CM Series Intelligent Modular UPS



# WHY CHOOSE US? WHAT CAN WE DO FOR YOU? WHAT DO WE OFFER?

This series modular UPS is a green environmental protection, high efficiency and energy saving, high reliability of UPS which specially developed by manufacturer, the system adopt the most advanced technology in the field of power electronics and automatic control, with its 10 patents, realize the modular design, support online hot-swap function, make the investment planning implementation on demand, dynamic growth, not only reduce the initial acquisition cost, but also meet the late on-demand expansion of equipment, widely used in government, education, finance, securities, taxation, telecommunications, transportation, medical, server room, data center, etc. (add: outside view)

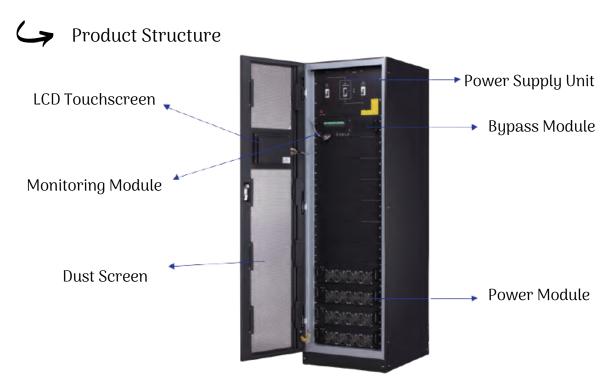


CM Series Intelligent Modular UPS




#### World-leading IGBT Integrated Module Technology

Power convert unit, adopt integrated IGBT template, system's reliability is greatly improved compared to discrete devices, consistency of manufacturing processes is ensured, thus the quality of the product is greatly improved

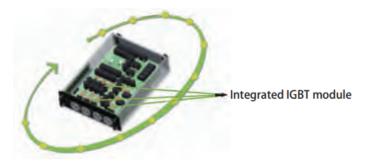



#### Composition Module

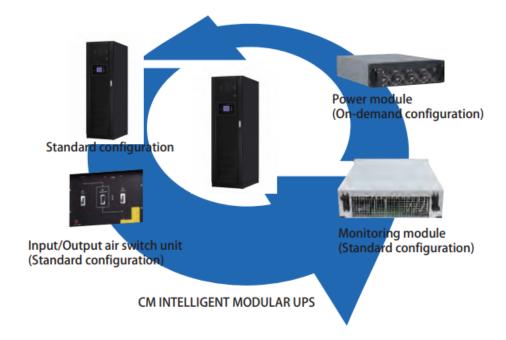



	Detail	Tower UPS	Modular UPS	
Equipment	UPS Host	The machine designer redundant power, cost of medium	Small module weaver redundant power, cost of medium	
	Battery	Very few claims that can be shared, configuration is higher	Low cost of part can share, flexible configuration	
	Investment Evaluation	***	****	
Installation and Transportation	Size and Weight	Big, leasing, the high cost of bearing parts	Small	
	Handling	Sometimes you need to change room contruction, the high cost	Ark, points module can transport	
	Dilatation	The basic equal to demolish rebuild, the high cost	Easy expansion, investment by installments	
	Investment Evaluation	***	***	
Operating	Efficiency	85% ~ 94%	94% ~ 96%	
	Investment Evaluation	***	***	
Maintenance	Maintenance	Need dismantle the cable and the internal structure, the high cost of maintenance; class module type removable modules maintenance,	Power module online hot-swap replacement, low maintenance cost	
	Investment Evaluation	***	***	
Overall Investment Evalution		***	****	

#### Comparison between Tower UPS and Modular UPS reliability

	Detail	Tower UPS	Modular UPS	
Parallel Network Reliability	Hardware Design	Power controller integrated weaver control	Power controller + parallel controller	
	Logic Design	master-slave competition redundancy, complex logic	Master-slave competition	
	Communication	Single CAN or double CAN	Single CAN or double CAN	
	Reliability Evaluation	****	****	
Power Unit Reliability	Voltage Loop	Independent control	Independent control	
	Electric Current Loop	Analog / Digital control	All-digital control	
	Device Level Reliability	Less redundant	Part of the redundancy	
	Reliability Evaluation	***	***	
Bypass Unit Reliability	Parallel Bypass	Dispersible bypass	Rack weaver: concentrated bypass  Frame between the weaver: scattered bypass	
	Reliability Evaluation	****	***	
Power Unit Failure Influence	Range	Bad one unit is missing, the whole system power loss	Bad a module affects only a single module, small power loss	
	Reliability Evaluation	****	****	
Overall Reliability Evaluation		***	<b>*</b> **	

#### **ENERGY-SAVING ENVIRONMENTAL PROTECTION**

CM series modular UPS input power factor is above 0.99, reduce the line loss, improve the utilization rate of power supply, high efficiency of the machine reduce the loss, save electricity, implement green energy saving; meanwhile the total harmonic distortion <3% the grid harmonic interference reduce to a minimum, effectively reduce the network load and power loss, is the ideal environmental protection type efficient UPS.

#### **EASY TO USE, EASY MAINTENANCE**


CM series modular UPS adopt large touch screen, LCD+LED display, friendly man-machine interface, use very convenient; the whole system is composed of each module, support hot-swap function, easy to later expansion for users, which can realize the online replacement, online maintenance, reduce the difficulty of maintenance, reduce the maintenance time.

#### **CAPACITY FLEXIBLE CONFIGURATION**


CM series modular UPS system adopt the modular design, online hot-swap support function, realize the online expansion, meet user later load increases the uninterruptible power supply equipment, on the premise of ensuring high reliability, investment planning and implementation on demand, dynamic growth.

#### SUPERVISORY MODULE

- Support multiple dry contact output;
- System data acquisition completed by 32-bit DSP processor;
- The working state of the machine for display, alarm and communications:
- Monitoring unit can provide RS232 and RS485 communication interface;
- Optional SNMP network adapter for remote network monitoring;
- Operating interface using multiple key navigation form, make the operation



#### REDUNDANT HIGH RELIABILITY

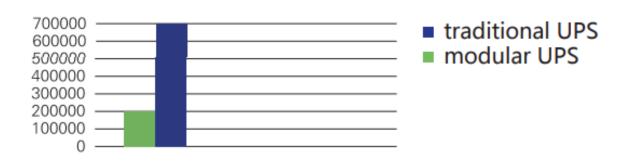

DESIGN

#### PARALLEL TECHNOLOGY

CM series intelligent modular UPS adopt one more mature parallel technique of synchronous "hot", when two UPS when performing parallel operation, no need to get each other's real-time parameters such as output power, phase, voltage, current, output,, can achieve synchronization and divide the load current, output stability and high reliability.

#### **FEATHURE:**

- Two UPS independent work, no subordination;
- Two UPS parallel, system capacity can reach 900kVA;
- Don't need to signal the communication cable between two UPS, reduce the failure rate;
- When two UPS work bypass at the same time, can provide greater fault clearance ability;
- When a UPA failure occurs, another UPS charge to the failure UPS battery, ensure the full charge of the battery, ensure the grid after abnormal into battery backup time, realize the reliable uninterruptible power supply.

#### **POWER MODULE**

Power module adopt integrated encapsulation IGBT module rather than discrete device, relative to the separation of IGBT device, integrated encapsulation IGBT module has more current carrying capacity, less power consumption, effectively improve the efficiency and reliability of power module, the consistency of the manufacturing process at the same time, greatly improving the product quality. Using discrete device for the design of power module, need multiple parallel IGBT device, at the same time to deal with the fly-wheel diode design and process problems, to the system's reliability and consistency of the production process are great risk; And integrated encapsulation of IGBT module has great electric current breaking capacity, without parallel can satisfy the demand of the power module, integrated the fly-wheel diode at the same time, reduce the risk of the design process and production process, integrated packaging through the use of IGBT module, X7 series of modular products in the implementation of high efficiency, low power consumption at the same time, to ensure the high reliability of power module and system.

#### **FEATURES**:

- Each module can work independently;
- Each module are independent of the charging system;
- Each module through the LED display the running state;
- Each module structure with high density compact design, save space.
- Each module are independent of double DSP digital intelligent controller;
- Each module adopts double conversion design online, ensure high quality output power;
- Each module can be online hot plug, easy maintenance, easy to use online;
- Free to choose the number of power module according to the need, support online capacity and save investment.

#### **CM SERIES HIGH POWER MODULAR UPS**

CM Series intelligent modular UPS was to meet government, education, finance, securities, taxation, telecommunications, transportation and other industries in the high power modular UPS and tailored to the needs of a series of products, single cabinet system can choose  $1 \sim 10$  sets of power module, the biggest can support to the 300 kVA capacity; intelligent modular UPS in reducing main tenancy costs at the same time can provide higher efficiency, more flexible maneuverability, and better stability and reliability.



Modular UPS

### SMART SERIES LOW POWER MODULAR UPS

CM SMART series intelligent modular UPS is to meet the government, education, finance, securities, taxation, telecommunications, transportation and other industries of small and medium-sized power modular UPS and tailored to the needs of series of products, single cabinet system can choose  $1 \sim 6$  sets of power module, the biggest can support to the 180 kVA capacity; CM SMART series intelligent modular UPS in reducing maintenance costs at the same time can provide higher efficiency, more flexible maneuverability, and better stability and reliability.

Single cabinet system capacity with 60kVA, 90kVA, 120kVA, 150kVA, 180kVA power module has 10kVA, 15kVA, 20kVA, 25kVA, 30kVA five power, user can according to the size of the load, select the appropriate power module and quantity, optimal capacity matching.



SMART Series Low Power Modular UPS

#### **CM SERIES HIGH POWER MODULAR UPS**

- Green energy-saving power supply;
- The adaptive synchronization control technology;
- Online hot plug expansion;
- Excellent generator match performance;
- Support parallel sharing function of battery pack;
- Industry system the most perfect protection function;
- Perfect remote network management solution;
- All circuit boards are adopted three proofing process;
- Redundant intelligent speed fan, low noise, energy conservation;
- Can be close to other equipment installation, save floor space;
- Can begin battery DC (cold boot), convenient operation;
- large screen touch screen man-machine interface, rich information;
- Fully digital modules in parallel technology, excellent circulation index;
- All the positive maintenance, support way up and down into the line, convenient user terminal;
- Super grid adaptability and load adaptability and strong load capacity;
- Rectifier, inverter, charge and discharge all realize DSP digital control;
- High density compact design, on the premise of guarantee high reliability, save space.
- Independent charging system, powerful ability of charging, intelligent complete battery management plan;
- System cabinet internal integrated distribution system, installation is convenient and save the user's investment;
- Adopt module integrated IGBT packages, greatly improve the reliability of the power module and system;
- Dual DSP controller of power module, power module independent control, no single point of failure risk;
- UPS system modular design, N + X redundant reliability, long MTBF.

## SMART MODULAR UPS - LOW POWER

Model	System	CM-120/20	CM-150/25	CM-180/30	
	Power Module	HM20	HM25	HM30	
Capacity	System Power	120kVA	150kVA	180kVA	
	Connection	Three-phase five-wire system			
	Rated Voltage	380/400/415VAC			
	Voltage Range	-40% TO +30%			
Main Line	Rated Frequency	50/60Hz			
	Frequency Range	40~70Hz			
	Current Harmonic Wave Distortion	THDI<3%			
	Input Power Factor	>0.99			
	Rated Voltage	380/400/415VAC			
Bypass	Voltage Range	20% to +15% (other value out of this range can be set)			
Бураза	Rated Frequency	50/60Hz			
	Frequency Range		±1Hz, ±3Hz, ±5Hz		
Battery	Battery Cells		40 batteries (32-44 optional)		
	Connection Method		Three-phase five-wire system		
	Rated Voltage		380/400/415VAC		
	Rated Frequency		50/60Hz		
	Voltage Accurancy	±1%			
	Frequency Accurancy	50/60Hz ± 0.01Hz			
Output	Voltage Harmonic Wave Distortion	<1% (Linear Load); <3% (Non-Linear Load)			
	Range of Frequency Synchro	±3Hz, ±0.5Hz to ±5Hz (other value out of this range can be set)			
	Peak Value	≥3:1			
	Three Phase Accurancy	<0.5°			
	Power Factor	1.0			
	Overload Capability	110%, switch to bypass after 3 hours; 125%, switch to bypass after 30 minutes; 150%, switch to bypass after 5 minutes			
	City Electricity Mode	≥96%			
Efficiency	Battery Mode	≥96%			
	ECO Mode	≥98%			
	Wire Connection Method	Support up and down connection			
Marking Contact	Protection Level	IP20/IP21 (Optional)			
Machine System	Panel Display	LCD+LED, super big colorful touch screen			
	Communication Interface	RS232, RS485, SNMP, EPO, generator interface			
	Running Temp	-10°C~40°C			
On another Environment	Storage Temp	-25°C~70°C			
Operation Environment	Relative Humidity	0~95% (with no condensation)			
	Noise (dB)	<55dB <65dB			
Weight (KG)	Cabinet	150 180		80	
	Power Module	22	32	16	
Size (WxDxH) mm	Cabinet	600x900x1600 600x1100x1600			
	Power Module	440x590x134 460x790x134			

# MODULAR UPS - HIGH POWER

Model	System	CM-200/20	CM-250/250	CM-300/30	CM-500/50
	Power Module	HM20	HM25	HM30	HM50
Capacity	System Power	200kVA	250kVA	300kVA	500kVA
	Connection	Three-phase five-wire system			
Main Line	Rated Voltage	380/400/415VAC			
	Voltage Range	-40% TO +30%			
	Rated Frequency	50/60Hz			
	Frequency Range	40~70Hz			
	Current Harmonic Wave Distortion	THDI<3%			
	Input Power Factor	>0.99			
	Rated Voltage	380/400/415VAC			
Bypass	Voltage Range	20% to +15% (other value out of this range can be set)			
bypass	Rated Frequency	50/60Hz			
	Frequency Range	±1Hz, ±3Hz, ±5Hz			
Battery	Battery Cells	40 batteries (32-44 optional)			
	Connection Method	Three-phase five-wire system			
, l	Rated Voltage	380/400/415VAC			
	Rated Frequency	50/60Hz			
	Voltage Accurancy	±1%			
	Frequency Accurancy	50/60Hz ± 0.01Hz			
Output	Voltage Harmonic Wave Distortion	<1% (Linear Load); <3% (Non-Linear Load)			
	Range of Frequency Synchro	±3Hz, ±0.5Hz to ±5Hz (other value out of this range can be set)			
	Peak Value		≥	3:1	
	Three Phase Accurancy	<0.5°			
	Power Factor		1	.0	
	Overload Capability	110%, switch to bypass after 3 hours; 125%, switch to bypass after 30 minutes; 150%, switch to bypass after 5 minutes			
	City Electricity Mode	≥96%			
Efficiency	Battery Mode	≥96%			
	ECO Mode	≥98%			
	Wire Connection Method	Support up and down connection			
Marking Contain	Protection Level	IP20/IP21 (Optional)			
Machine System	Panel Display	LCD+LED, super big colorful touch screen			
	Communication Interface	RS232, RS485, SNMP, EPO, generator interface			
	Running Temp	-10°C~40°C			
Operation Environment	Storage Temp	-25°C~70°C			
	Relative Humidity	0~95% (with no condensation)			
	Noise (dB)	<55dB <65dB			
Weight (KG)	Cabinet	180	2-	45	470
	Power Module	22	32	36	45
Size ////wDull\	Cabinet	600x900x2000	600x11	00x2000	1300x1100x2000
Size (WxDxH) mm	Power Module	440x590x134	460x7	90x134	510x700x178